


# Panasonic




## Certificates & Standards

RoHs / CISPR15 / TISI

## Dimension and Materials



## Photometric Chart

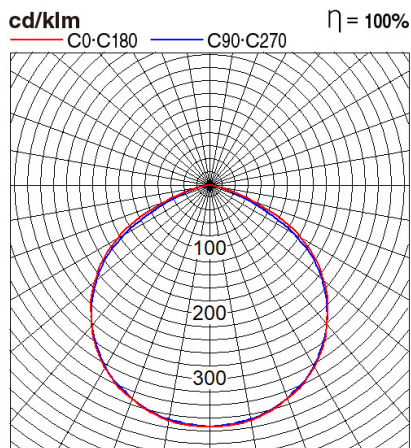

|                              |                             |
|------------------------------|-----------------------------|
| Ref. No.                     |                             |
| Type of Luminaire            | Floodlight                  |
|                              | Standard Floodlight (Trade) |
|                              | Mini 2G                     |
| Set Model No.                | <b>NYV00001BE1AK</b>        |
| Type of Light Source         | LED                         |
| Power Input                  | 10W                         |
| System Lumen Output          | 900 lm                      |
| System Efficacy              | 90 lm/W                     |
| Power Voltage                | 220-240V                    |
| Power Factor                 | 0.5                         |
| Lifetime                     | 30000H(L70)                 |
| CCT                          | 3000K                       |
| CRI                          | 80                          |
| SDCM                         |                             |
| Input Frequency              | 50/60Hz                     |
| Dimming                      | non-Dimmable                |
| Dimming Range                |                             |
| UGR                          |                             |
| Glare Cut Angle              |                             |
| Beam Angle                   | 110deg.                     |
| Rotation Angle               |                             |
| Tilt Angle                   |                             |
| IP code                      | 65                          |
| IK code                      |                             |
| Ambient Temperature Range    | -20 - 45°C                  |
| Surge Protection             |                             |
| Classification of Luminaires |                             |
| THDi                         |                             |
| Effective Projected Area     |                             |
| Driver                       | Integrated                  |
| Cut Out Size                 |                             |
| Dimensions                   | 90mm*91mm*27mm              |
| Weight                       | 0.168 kg                    |
| Body                         | Steel(Gray)                 |
| Reflector                    | Glass (Frost)               |
| Diffuser                     |                             |
| Trim                         |                             |
| Casing                       |                             |
| Country of Origin            | China                       |
| Brand                        | Panasonic                   |
| Remarks                      |                             |

Spec and certification may change without notice.

## Others