


Panasonic




Certificates & Standards

RoHs / CISPR15 / TISI

Dimension and Materials

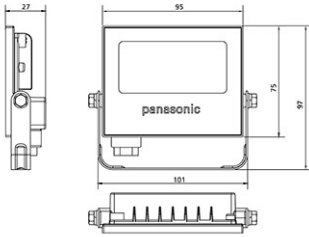

Photometric Chart

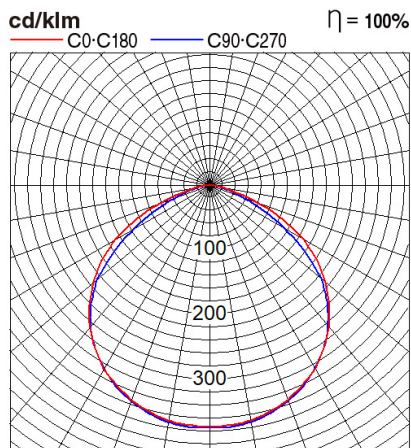

| | |
|------------------------------|-----------------------------|
| Ref. No. | |
| Type of Luminaire | Floodlight |
| | Standard Floodlight (Trade) |
| | Mini 2G |
| Set Model No. | NYV00002BE1AK |
| Type of Light Source | LED |
| Power Input | 20W |
| System Lumen Output | 1800 lm |
| System Efficacy | 90 lm/W |
| Power Voltage | 220-240V |
| Power Factor | 0.5 |
| Lifetime | 30000H(L70) |
| CCT | 3000K |
| CRI | 80 |
| SDCM | |
| Input Frequency | 50/60Hz |
| Dimming | non-Dimmable |
| Dimming Range | |
| UGR | |
| Glare Cut Angle | |
| Beam Angle | 110deg. |
| Rotation Angle | |
| Tilt Angle | |
| IP code | 65 |
| IK code | |
| Ambient Temperature Range | -20 - 45°C |
| Surge Protection | |
| Classification of Luminaires | |
| THDi | |
| Effective Projected Area | |
| Driver | Integrated |
| Cut Out Size | |
| Dimensions | 97mm*101mm*27mm |
| Weight | 0.214 kg |
| Body | Steel(Gray) |
| Reflector | Glass (Frost) |
| Diffuser | |
| Trim | |
| Casing | |
| Country of Origin | China |
| Brand | Panasonic |
| Remarks | |

Others

Spec and certification may change without notice.