


# Panasonic




## Certificates & Standards

RoHs / CISPR15 / TISI

## Dimension and Materials



## Photometric Chart

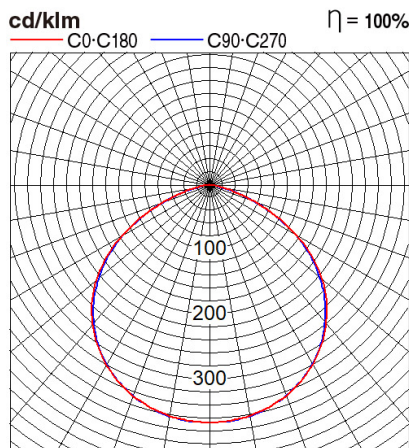

Ref. No.	
Type of Luminaire	Floodlight
	Standard Floodlight (Trade)
	Mini 2G
Set Model No.	<b>NYV00008BE1AK</b>
Type of Light Source	LED
Power Input	200W
System Lumen Output	18000 lm
System Efficacy	90 lm/W
Power Voltage	220-240V
Power Factor	0.9
Lifetime	30000H(L70)
CCT	3000K
CRI	80
SDCM	
Input Frequency	50/60Hz
Dimming	non-Dimmable
Dimming Range	
UGR	
Glare Cut Angle	
Beam Angle	110deg.
Rotation Angle	
Tilt Angle	
IP code	65
IK code	
Ambient Temperature Range	-20 - 45°C
Surge Protection	
Classification of Luminaires	
THDi	
Effective Projected Area	
Driver	Integrated
Cut Out Size	
Dimensions	311mm*341mm*36mm
Weight	2.044 kg
Body	Steel(Gray)
Reflector	Glass (Frost)
Diffuser	
Trim	
Casing	
Country of Origin	China
Brand	Panasonic
Remarks	

Spec and certification may change without notice.

## Others