


Panasonic




Certificates & Standards
RoHs / TISI

Dimension and Materials



Photometric Chart

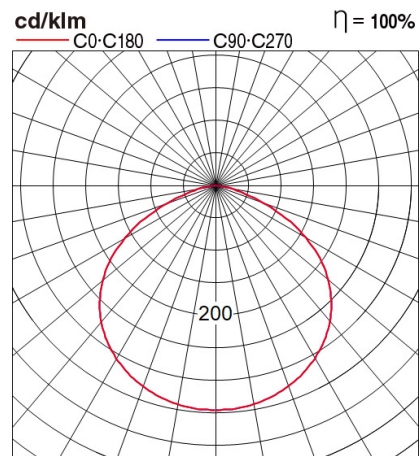

Ref. No.	
Type of Luminaire	Floodlight
	Standard Floodlight (Trade)
	300W
Set Model No.	NYV00029BE1A
Type of Light Source	LED
Power Input	300W
System Lumen Output	36000 lm
System Efficacy	120 lm/W
Power Voltage	220-240V
Power Factor	0.95
Lifetime	30000H(L70)
CCT	5700K
CRI	80
SDCM	
Input Frequency	50/60Hz
Dimming	non-Dimmable
Dimming Range	
UGR	
Glare Cut Angle	
Beam Angle	110deg.
Rotation Angle	
Tilt Angle	
IP code	66
IK code	
Ambient Temperature Range	-20 - 35°C
Surge Protection	
Classification of Luminaires	Class I
THDi	<10%
Effective Projected Area	
Driver	Integrated
Cut Out Size	
Dimensions	334mm*457mm*42mm
Weight	4.3 kg
Body	ADC12(Black)
Reflector	
Diffuser	
Trim	
Casing	Amber Glass(Transparent)
Country of Origin	China
Brand	Panasonic
Remarks	

Spec and certification may change without notice.

Others