


Panasonic




Certificates & Standards

RoHs / CISPR15 / TISI

Dimension and Materials

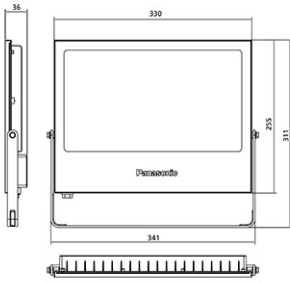

Photometric Chart

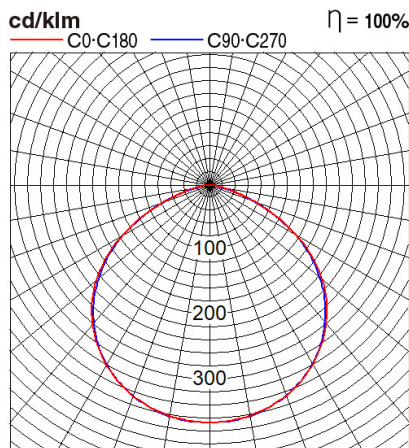

Ref. No.	
Type of Luminaire	Floodlight
	Standard Floodlight (Trade)
	Mini 2G
Set Model No.	NYV00058BE1AK
Type of Light Source	LED
Power Input	200W
System Lumen Output	18000 lm
System Efficacy	90 lm/W
Power Voltage	220-240V
Power Factor	0.9
Lifetime	30000H(L70)
CCT	6500K
CRI	80
SDCM	<5
Input Frequency	50/60Hz
Dimming	non-Dimmable
Dimming Range	
UGR	
Glare Cut Angle	
Beam Angle	110deg.
Rotation Angle	
Tilt Angle	
IP code	65
IK code	
Ambient Temperature Range	-20 - 45°C
Surge Protection	
Classification of Luminaires	
THDi	
Effective Projected Area	
Driver	Integrated
Cut Out Size	
Dimensions	311mm*341mm*36mm
Weight	2.044 kg
Body	Steel(Gray)
Reflector	Glass (Frost)
Diffuser	
Trim	
Casing	
Country of Origin	China
Brand	Panasonic
Remarks	

Spec and certification may change without notice.

Others