





Certificates & Standards  
CB / RoHs

Dimension and Materials



Photometric Chart

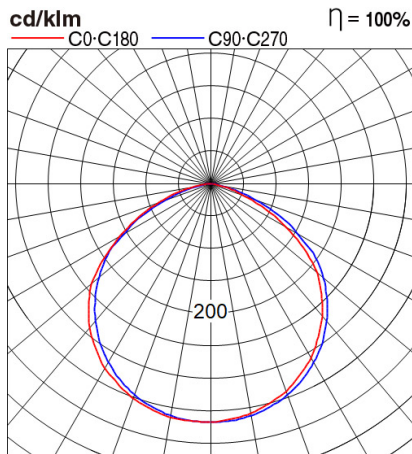

|                              |                                                                                                    |
|------------------------------|----------------------------------------------------------------------------------------------------|
| Ref. No.                     |                                                                                                    |
| Type of Luminaire            | Floodlight                                                                                         |
|                              | Standard Floodlight (Pro)                                                                          |
|                              | Ex                                                                                                 |
| Set Model No.                | NYV01003BE1A                                                                                       |
| Type of Light Source         | LED                                                                                                |
| Power Input                  | 50W                                                                                                |
| System Lumen Output          | 7250 lm                                                                                            |
| System Efficacy              | 145 lm/W                                                                                           |
| Power Voltage                | 120-277V                                                                                           |
| Power Factor                 | 0.95                                                                                               |
| Lifetime                     | 50000H(L70)                                                                                        |
| CCT                          | 3000K                                                                                              |
| CRI                          | 80                                                                                                 |
| SDCM                         | <6                                                                                                 |
| Input Frequency              | 50/60Hz                                                                                            |
| Dimming                      | non-Dimmable                                                                                       |
| Dimming Range                |                                                                                                    |
| UGR                          |                                                                                                    |
| Glare Cut Angle              |                                                                                                    |
| Beam Angle                   | 110deg.                                                                                            |
| Rotation Angle               |                                                                                                    |
| Tilt Angle                   |                                                                                                    |
| IP code                      | 66                                                                                                 |
| IK code                      | IK 08                                                                                              |
| Ambient Temperature Range    | -40 - 50°C                                                                                         |
| Surge Protection             | L-N:6kV, L/N-G:10kV                                                                                |
| Classification of Luminaires | Class I                                                                                            |
| THDi                         | <15%                                                                                               |
| Effective Projected Area     |                                                                                                    |
| Driver                       | External                                                                                           |
| Cut Out Size                 |                                                                                                    |
| Dimensions                   | W272mm*L332mm*H60mm                                                                                |
| Weight                       | 2.5 kg                                                                                             |
| Body                         | ADC12(Black)                                                                                       |
| Reflector                    |                                                                                                    |
| Diffuser                     | Glass                                                                                              |
| Trim                         |                                                                                                    |
| Casing                       |                                                                                                    |
| Country of Origin            | China                                                                                              |
| Brand                        | Panasonic                                                                                          |
| Remarks                      | Input current as of standard voltage (A):0.17-0.38,<br>Surge resistant voltage:L-N:6KV, L/N-G:10KV |

Spec and certification may change without notice.

Others