





Certificates & Standards
CB / RoHs

Dimension and Materials



Photometric Chart

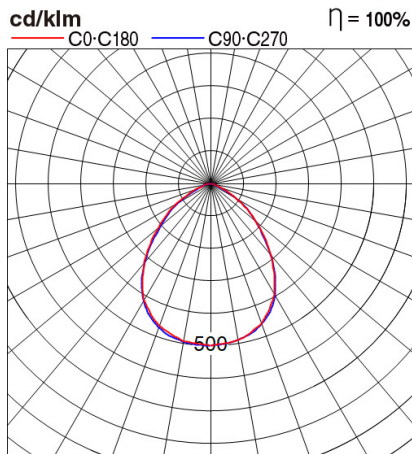

Ref. No.	
Type of Luminaire	Floodlight
	Standard Floodlight (Pro)
	Ex
Set Model No.	NYV01006BE1A
Type of Light Source	LED
Power Input	50W
System Lumen Output	7500 lm
System Efficacy	150 lm/W
Power Voltage	120-277V
Power Factor	0.95
Lifetime	50000H(L70)
CCT	4000K
CRI	80
SDCM	<6
Input Frequency	50/60Hz
Dimming	non-Dimmable
Dimming Range	
UGR	
Glare Cut Angle	
Beam Angle	90deg.
Rotation Angle	
Tilt Angle	
IP code	66
IK code	IK 08
Ambient Temperature Range	-40 - 50°C
Surge Protection	L-N:6kV, L/N-G:10kV
Classification of Luminaries	Class I
THDi	<15%
Effective Projected Area	
Driver	External
Cut Out Size	
Dimensions	W272mm*L332mm*H60mm
Weight	2.5 kg
Body	ADC12(Black)
Reflector	
Diffuser	Glass
Trim	
Casing	
Country of Origin	China
Brand	Panasonic
Remarks	Input current as of standard voltage (A):0.17-0.38, Surge resistant voltage:L-N:6KV, L/N-G:10KV

Spec and certification may change without notice.

Others