


Panasonic




Certificates & Standards

RoHS

Dimension and Materials

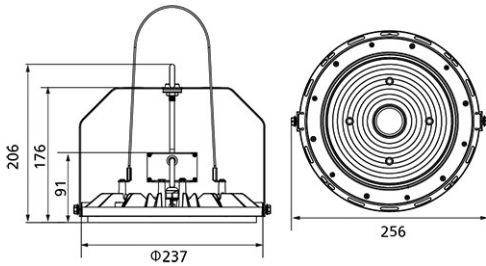

Photometric Chart

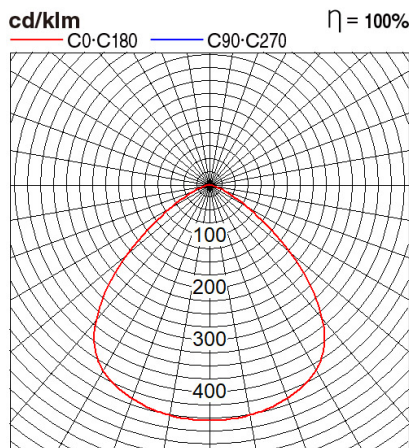

| | |
|------------------------------|--|
| Ref. No. | |
| Type of Luminaire | High Bay High Bay Special Environment SP High Bay Low Temperature Type |
| Set Model No. | NYV20408BE1A |
| Type of Light Source | LED |
| Power Input | 115W |
| System Lumen Output | 15000 lm |
| System Efficacy | 130 lm/W |
| Power Voltage | 220-240V |
| Power Factor | 0.95 |
| Lifetime | 30000H(L70) |
| CCT | 5000K |
| CRI | 80 |
| SDCM | <5 |
| Input Frequency | 50/60Hz |
| Dimming | non-Dimmable |
| Dimming Range | |
| UGR | |
| Glare Cut Angle | |
| Beam Angle | 90deg. |
| Rotation Angle | |
| Tilt Angle | |
| IP code | 65 |
| IK code | |
| Ambient Temperature Range | -40 - 50°C |
| Surge Protection | |
| Classification of Luminaires | Class I |
| THDi | |
| Effective Projected Area | |
| Driver | External |
| Cut Out Size | |
| Dimensions | 256mm*206mm |
| Weight | 1.4 kg |
| Body | Aluminium(Black) |
| Reflector | |
| Diffuser | PC(Transparent) |
| Trim | |
| Casing | |
| Country of Origin | China |
| Brand | Panasonic |
| Remarks | moisture condensation proof designed |

Others

Spec and certification may change without notice.