
Panasonic




Certificates & Standards
CB / RoHs / TISI

Dimension and Materials



Photometric Chart

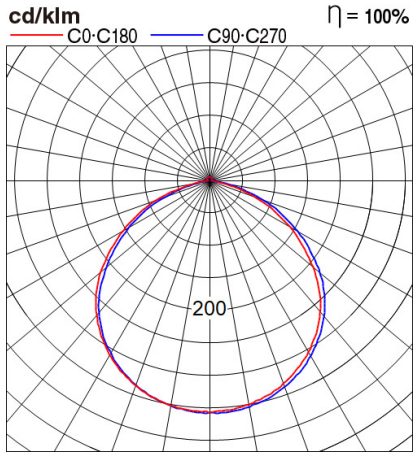

Ref. No.	
Type of Luminaire	High Bay
	High Efficacy
	Ex 5G
Set Model No.	**NYV20705BE1A**

Type of Light Source	LED
Power Input	60W
System Lumen Output	11400 lm
System Efficacy	190 lm/W
Power Voltage	120-277V
Power Factor	0.9
Lifetime	70000H(L70)
CCT	5000K
CRI	80
SDCM	<6
Input Frequency	50/60Hz
Dimming	non-Dimmable
Dimming Range	
UGR	
Glare Cut Angle	
Beam Angle	110deg.
Rotation Angle	
Tilt Angle	
IP code	65
IK code	IK 09
Ambient Temperature Range	-30-50℃
Surge Protection	L-N:6kV, L/N-G:6kV
Classification of Luminaries	Class Ⅰ
THDi	<10%
Effective Projected Area	
Driver	External
Cut Out Size	
Dimensions	L200mm*H152mm
Weight	1.25 kg
Body	ADC12(Black)
Reflector	
Diffuser	PC(Transparent)
Trim	
Casing	
Country of Origin	China
Brand	Panasonic
Remarks	Surge resistant voltage: L-N:6KV, L/N-G:6KV,

Spec and certification may change without notice.

Others