


# Panasonic




## Certificates & Standards

### Dimension and Materials



### Photometric Chart

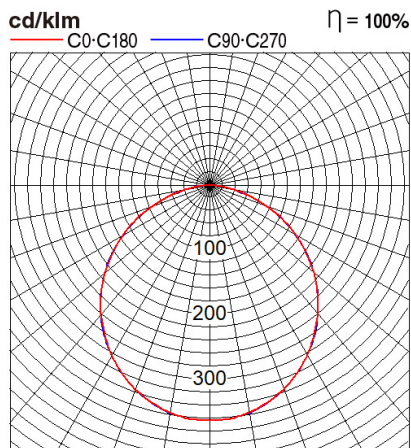

Ref. No.	
Type of Luminaire	Baselight Cleanroom Baselight Cleanroom (IMBUE)
Set Model No.	<b>PCR-M03364</b>
Type of Light Source	LED
Power Input	36W
System Lumen Output	3420 lm
System Efficacy	95 lm/W
Power Voltage	240V
Power Factor	0.95
Lifetime	50000H(L70)
CCT	4000K
CRI	80
SDCM	
Input Frequency	50Hz
Dimming	non-Dimmable
Dimming Range	
UGR	
Glare Cut Angle	
Beam Angle	
Rotation Angle	
Tilt Angle	
IP code	54
IK code	
Ambient Temperature Range	-10 - 45°C
Surge Protection	
Classification of Luminaires	
THDi	<10%
Effective Projected Area	
Driver	Non-Integral
Cut Out Size	
Dimensions	600mm*600mm*65mm
Weight	5.7 kg
Body	CRCA
Reflector	
Diffuser	PC
Trim	
Casing	
Country of Origin	India
Brand	Panasonic
Remarks	

Spec and certification may change without notice.

### Others