


Panasonic




Certificates & Standards

Dimension and Materials



Photometric Chart

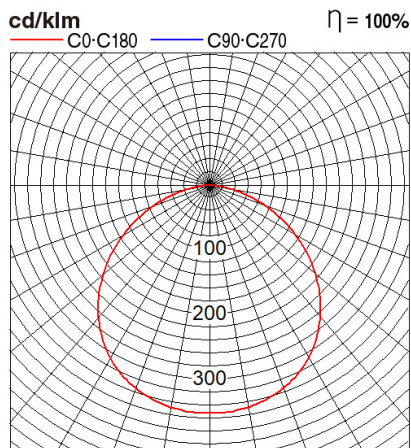

Ref. No.	
Type of Luminaire	Downlight
	Surface Mounted DL
	Surface Mounted DL
Set Model No.	PDLM19128
Type of Light Source	LED
Power Input	12W
System Lumen Output	1020 lm
System Efficacy	85 lm/W
Power Voltage	240V
Power Factor	0.9
Lifetime	50000H(L70)
CCT	5700K
CRI	80
SDCM	
Input Frequency	50Hz
Dimming	non-Dimmable
Dimming Range	
UGR	
Glare Cut Angle	
Beam Angle	120deg.
Rotation Angle	
Tilt Angle	
IP code	20
IK code	
Ambient Temperature Range	0 - 45°C
Surge Protection	
Classification of Luminaries	
THDi	
Effective Projected Area	
Driver	Integral
Cut Out Size	
Dimensions	102mm*200mm
Weight	0.88 kg
Body	Aluminium
Reflector	
Diffuser	Polystyrene
Trim	
Casing	
Country of Origin	India
Brand	Panasonic
Remarks	

Spec and certification may change without notice.

Others