


Panasonic




Certificates & Standards

Dimension and Materials



Photometric Chart

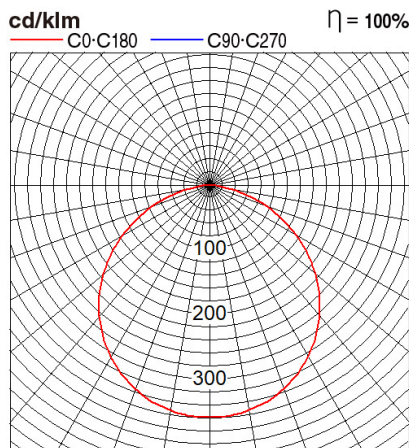

| | |
|------------------------------|-------------------------------|
| Ref. No. | |
| Type of Luminaire | Downlight |
| | Low Wattage Standard DL (Pro) |
| | Aluminum DL (ARUMI) |
| Set Model No. | PDLM26123 |
| Type of Light Source | LED |
| Power Input | 12W |
| System Lumen Output | 1200 lm |
| System Efficacy | 100 lm/W |
| Power Voltage | 240V |
| Power Factor | 0.9 |
| Lifetime | 50000H(L70) |
| CCT | 3000K |
| CRI | 80 |
| SDCM | |
| Input Frequency | 50Hz |
| Dimming | non-Dimmable |
| Dimming Range | |
| UGR | |
| Glare Cut Angle | |
| Beam Angle | |
| Rotation Angle | |
| Tilt Angle | |
| IP code | 20 |
| IK code | |
| Ambient Temperature Range | 0 - 45°C |
| Surge Protection | |
| Classification of Luminaires | |
| THDi | <10% |
| Effective Projected Area | |
| Driver | Non-Integral |
| Cut Out Size | |
| Dimensions | 139mm*33mm |
| Weight | 0.49 kg |
| Body | Alluminium PDC |
| Reflector | |
| Diffuser | PS |
| Trim | |
| Casing | |
| Country of Origin | India |
| Brand | Panasonic |
| Remarks | |

Spec and certification may change without notice.

Others