


Panasonic




Certificates & Standards

Dimension and Materials

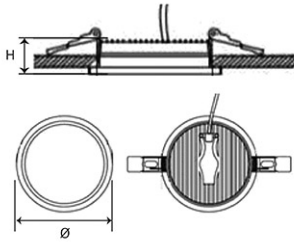

Photometric Chart

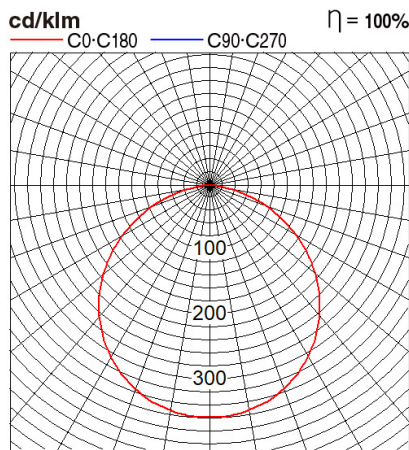

Ref. No.	
Type of Luminaire	Downlight
	Low Wattage Standard DL (Pro)
	Aluminum DL (ARUMI)
Set Model No.	PDLM26124
Type of Light Source	LED
Power Input	12W
System Lumen Output	1260 lm
System Efficacy	105 lm/W
Power Voltage	240V
Power Factor	0.9
Lifetime	50000H(L70)
CCT	4000K
CRI	80
SDCM	
Input Frequency	50Hz
Dimming	non-Dimmable
Dimming Range	
UGR	
Glare Cut Angle	
Beam Angle	
Rotation Angle	
Tilt Angle	
IP code	20
IK code	
Ambient Temperature Range	0 - 45°C
Surge Protection	
Classification of Luminaires	
THDi	<10%
Effective Projected Area	
Driver	Non-Integral
Cut Out Size	
Dimensions	139mm*33mm
Weight	0.49 kg
Body	Alluminium PDC
Reflector	
Diffuser	PS
Trim	
Casing	
Country of Origin	India
Brand	Panasonic
Remarks	

Spec and certification may change without notice.

Others