


# Panasonic




## Certificates & Standards

### Dimension and Materials

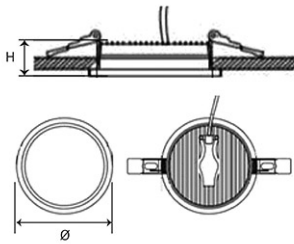

### Photometric Chart

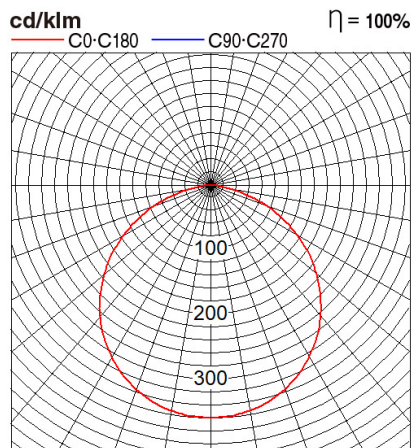

Ref. No.	
Type of Luminaire	Downlight
	Low Wattage Standard DL (Pro)
	Aluminum DL (ARUMI)
Set Model No.	<b>PDLM26158</b>
Type of Light Source	LED
Power Input	15W
System Lumen Output	1650 lm
System Efficacy	110 lm/W
Power Voltage	240V
Power Factor	0.9
Lifetime	50000H(L70)
CCT	6000K
CRI	80
SDCM	
Input Frequency	50Hz
Dimming	non-Dimmable
Dimming Range	
UGR	
Glare Cut Angle	
Beam Angle	
Rotation Angle	
Tilt Angle	
IP code	20
IK code	
Ambient Temperature Range	0 - 45°C
Surge Protection	
Classification of Luminaires	
THDi	<10%
Effective Projected Area	
Driver	Non-Integral
Cut Out Size	
Dimensions	139mm*33mm
Weight	0.49 kg
Body	Alluminium PDC
Reflector	
Diffuser	PS
Trim	
Casing	
Country of Origin	India
Brand	Panasonic
Remarks	

Spec and certification may change without notice.

### Others