





Certificates & Standards

Dimension and Materials

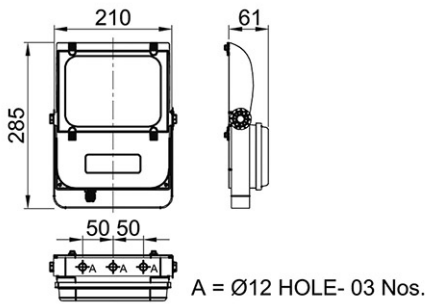

Photometric Chart

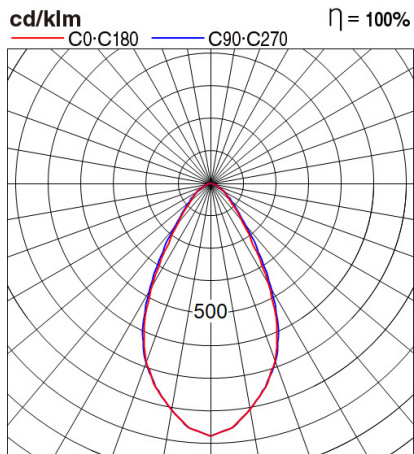

Ref. No.	
Type of Luminaire	Floodlight
	Standard Floodlight (Pro)
	Floodlight
Set Model No.	PFLM19908
Type of Light Source	LED
Power Input	90W
System Lumen Output	8100 lm
System Efficacy	90 lm/W
Power Voltage	220-240V
Power Factor	0.95
Lifetime	25000H(L70)
CCT	5700K
CRI	70
SDCM	
Input Frequency	50Hz
Dimming	non-Dimmable
Dimming Range	
UGR	
Glare Cut Angle	
Beam Angle	90deg.
Rotation Angle	
Tilt Angle	
IP code	66
IK code	
Ambient Temperature Range	-10 - 45°C
Surge Protection	4kV
Classification of Luminaries	
THDi	<10%
Effective Projected Area	
Driver	Integrated
Cut Out Size	
Dimensions	W210mm*L285mm*H61mm
Weight	2.8 kg
Body	ALSI132
Reflector	
Diffuser	Toughened Glass
Trim	
Casing	
Country of Origin	India
Brand	Panasonic
Remarks	

Spec and certification may change without notice.

Others