





Certificates & Standards

Dimension and Materials

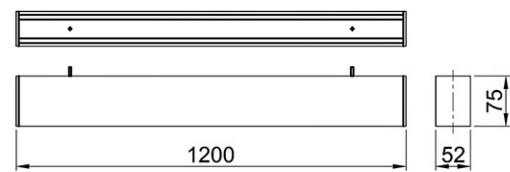

Photometric Chart

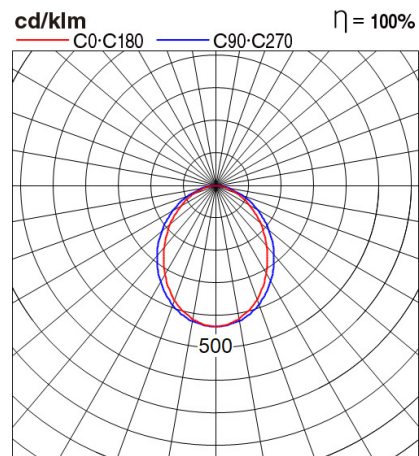

Ref. No.	
Type of Luminaire	Baselight
	Linear Light
	High Efficacy Linear Light (SLENDO ADV)
Set Model No.	PLHM10284
Type of Light Source	LED
Power Input	28W
System Lumen Output	2940 lm
System Efficacy	105 lm/W
Power Voltage	220-240V
Power Factor	0.95
Lifetime	50000H(L70)
CCT	4000K
CRI	80
SDCM	
Input Frequency	50Hz
Dimming	non-Dimmable
Dimming Range	
UGR	
Glare Cut Angle	
Beam Angle	120deg.
Rotation Angle	
Tilt Angle	
IP code	20
IK code	
Ambient Temperature Range	0 - 45°C
Surge Protection	
Classification of Luminaires	
THDi	<10%
Effective Projected Area	
Driver	External
Cut Out Size	
Dimensions	55mm*1200mm*75mm
Weight	2.01 kg
Body	Aluminium Extrusion
Reflector	
Diffuser	PMMA
Trim	
Casing	
Country of Origin	India
Brand	Panasonic
Remarks	

Spec and certification may change without notice.

Others