
Panasonic



**Certificates & Standards**
RoHs

## Dimension and Materials

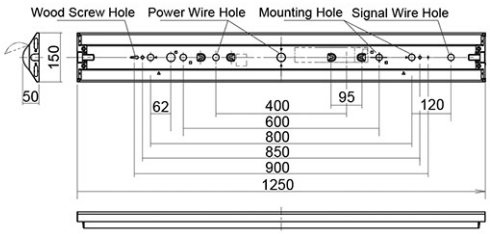


## Photometric Chart

| | |
|---|---|
| Ref. No. | |
| Type of Luminaire | Baselight |
| | Baselight_Standard |
| | iD Series_V-Shape 4ft |
| Set Model No. | **XLX460AENPLE9031** |

| | |
|---|---|
| Type of Light Source | LED |
| Power Input | 43.1W |
| System Lumen Output | 6900 lm |
| System Efficacy | 160 lm/W |
| Power Voltage | 100-242V |
| Power Factor | 0.9 |
| Lifetime | 40000H(L70) |
| CCT | 5000K |
| CRI | 83 |
| SDCM | |
| Input Frequency | 50/60Hz |
| Dimming | non-Dimmable |
| Dimming Range | |
| UGR | |
| Glare Cut Angle | |
| Beam Angle | 120deg. |
| Rotation Angle | |
| Tilt Angle | |
| IP code | 20 |
| IK code | |
| Ambient Temperature Range | 5 - 35℃ |
| Surge Protection | |
| Classification of Luminaries | |
| THDi | |
| Effective Projected Area | |
| Driver | Integrated |
| Cut Out Size | |
| Dimensions | W150mm*L1250mm*H50mm |
| Weight | |
| Body | Steel With White Painted |
| Reflector | |
| Diffuser | Polycarbonate |
| Trim | |
| Casing | |
| Country of Origin | Indonesia |
| Brand | Panasonic |
| Remarks | |

Spec and certification may change without notice.

Others