
Panasonic



Certificates & Standards
RoHs

Dimension and Materials

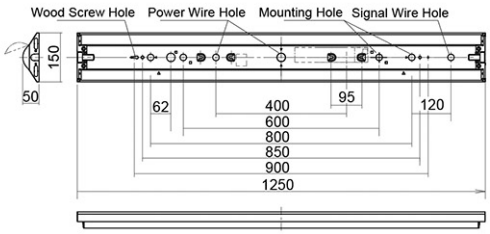

Photometric Chart

Ref. No.	
Type of Luminaire	Baselight
	Baselight_Standard
	iD Series_V-Shape 4ft
Set Model No.	**XLX460AEWPLE9031**

Type of Light Source	LED
Power Input	43.1W
System Lumen Output	6530 lm
System Efficacy	152 lm/W
Power Voltage	100-242V
Power Factor	0.9
Lifetime	40000H(L70)
CCT	4000K
CRI	83
SDCM	
Input Frequency	50/60Hz
Dimming	non-Dimmable
Dimming Range	
UGR	
Glare Cut Angle	
Beam Angle	120deg.
Rotation Angle	
Tilt Angle	
IP code	20
IK code	
Ambient Temperature Range	5 - 35℃
Surge Protection	
Classification of Luminaries	
THDi	
Effective Projected Area	
Driver	Integrated
Cut Out Size	
Dimensions	W150mm*L1250mm*H50mm
Weight	
Body	Steel With White Painted
Reflector	
Diffuser	Polycarbonate
Trim	
Casing	
Country of Origin	Indonesia
Brand	Panasonic
Remarks	

Spec and certification may change without notice.

Others