




Certificates & Standards

RoHs

Dimension and Materials

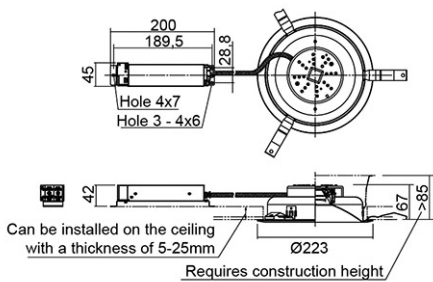

Photometric Chart

Ref. No.	
Type of Luminaire	Downlight
	High Wattage Standard DL (Pro)
	J-Series
Set Model No.	XND3588SNLZ9031
Type of Light Source	LED
Power Input	29.1W
System Lumen Output	3985 lm
System Efficacy	137 lm/W
Power Voltage	100-242V
Power Factor	0.9
Lifetime	60000H(L70)
CCT	5000K
CRI	85
SDCM	
Input Frequency	50/60Hz
Dimming	Dimmable
Dimming Range	
UGR	
Glare Cut Angle	
Beam Angle	45deg.
Rotation Angle	
Tilt Angle	
IP code	20
IK code	
Ambient Temperature Range	5° - 35°C
Surge Protection	
Classification of Luminaires	
THDi	
Effective Projected Area	
Driver	Integrated
Cut Out Size	
Dimensions	223mm*85mm
Weight	
Body	ADC
Reflector	
Diffuser	Polycarbonate
Trim	
Casing	
Country of Origin	Indonesia
Brand	Panasonic
Remarks	

Others

Spec and certification may change without notice.