




### Certificates & Standards

RoHs

### Dimension and Materials

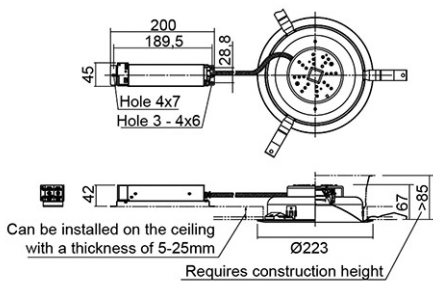

### Photometric Chart

|                              |                                |
|------------------------------|--------------------------------|
| Ref. No.                     |                                |
| Type of Luminaire            | Downlight                      |
|                              | High Wattage Standard DL (Pro) |
|                              | J-Series                       |
| Set Model No.                | <b>XND3588SWLZ9031</b>         |
| Type of Light Source         | LED                            |
| Power Input                  | 29.1W                          |
| System Lumen Output          | 3950 lm                        |
| System Efficacy              | 136 lm/W                       |
| Power Voltage                | 100-242V                       |
| Power Factor                 | 0.9                            |
| Lifetime                     | 60000H(L70)                    |
| CCT                          | 4000K                          |
| CRI                          | 85                             |
| SDCM                         |                                |
| Input Frequency              | 50/60Hz                        |
| Dimming                      | Dimmable                       |
| Dimming Range                |                                |
| UGR                          |                                |
| Glare Cut Angle              |                                |
| Beam Angle                   | 45deg.                         |
| Rotation Angle               |                                |
| Tilt Angle                   |                                |
| IP code                      | 20                             |
| IK code                      |                                |
| Ambient Temperature Range    | 5° - 35°C                      |
| Surge Protection             |                                |
| Classification of Luminaires |                                |
| THDi                         |                                |
| Effective Projected Area     |                                |
| Driver                       | Integrated                     |
| Cut Out Size                 |                                |
| Dimensions                   | 223mm*85mm                     |
| Weight                       |                                |
| Body                         | ADC                            |
| Reflector                    |                                |
| Diffuser                     | Polycarbonate                  |
| Trim                         |                                |
| Casing                       |                                |
| Country of Origin            | Indonesia                      |
| Brand                        | Panasonic                      |
| Remarks                      |                                |

Others

Spec and certification may change without notice.