## **>>>**


## Connection by using "ad hoc mode"

- This ad hoc Connection is for iPhone/ iPad. (Android OS can not do this connection)
- After finish ad hoc Connection, return to original setting. It will not return to previous LAN Mode setting automatically.



Mobile Device









Manual Wi-Fi Connection setting through "Operation Panel" on the Machine

## **>>>**

## **Machine Setting**

1. Press "MENU" → "#" " 5 " " 8 " " 0 ".

The display will show "LAN MODE = WIRED "

Press " ▲ "button to select " WIRELESS "

Press "SET" button.

Then the machine will go into the Self-Maintenance Mode.













COPTES:01 COPY:PRESS STAR

Note: Required to return original setting after using this ad hoc Connection. This setting change will not return automatically.

2. Press "MENU" -> "#" "5 " "3 " "3 "

The display will show "AUTO IP= DISABLED"

Press " ▲ " button to select " ENABLED "

Press "SET" button.







Note: Required to return original setting after using this ad hoc Connection. This setting change will not return automatically.

## **>>>**


## **Machine Setting**

3. Press " 5 " " 8 " " 5 "
The display will show " CONFIGURATION PRESS SET "
Press " SET " button.



- 4. The display will show "SSID= "
  - \* Input the SSID name that you want to set up on this machine by using 10 key.
  - \* For easy searching of the machine, enter as "SSID= MB2170"

Then press "SET" button.

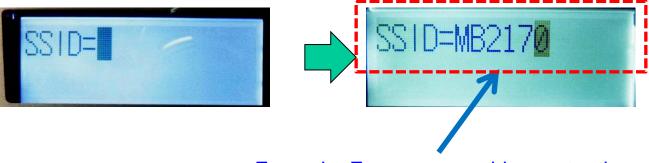

Example: For easy searching, enter the Machine name from 10 key.

## **>>>**

## **Machine Setting**

5. The display will show "CONNECTION TYPE= INFRA. "

Press " A "button to select " AD HOC "

Press "SET" button.







Note: Required to return original setting after using this ad hoc Connection. This setting change will not return automatically.

6. The display will show "AUTHENTIFICATION= OPEN " Press "SET "button.



7. The display will show "ENCRIPTION= WEP128"

Press " **A** " button to for your convenience seting.

\* ENCRIPTION= DISABLED : No need to enter Password

\* ENCRIPTION= WEP64 : set Password with 5 digit ( xxxxx)






## **>>>**

## **Machine Setting**

8. Then press "SET" button and the machine will show "KEY=". Please proceed to input the password. Ex.) AAAAA (in case ENCRIPTION= WEP64)



9. Then press "SET" button and the machine will show "WIRELESS SETUP CONNECTING..."

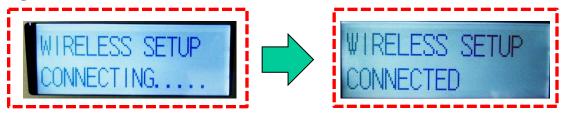


- \*After finish Mobile Device operation (Operation "13" on page 8), the LCD on the machine will change from "CONNECTING... "to "CONNECTED".
- 10. Bring your Mobile Device to search the Wi-Fi signal which you put the name at SSID name setting (example: MB2170)
  - \* If you set the Password, please enter the password accordingly. (example: AAAAA)
  - \*For the detail setting on the Mobile Device, please proceed to refer from next page.




## **Mobile Device Setting**

11. Set "Wi-Fi" to ON setting with your Mobile Device.

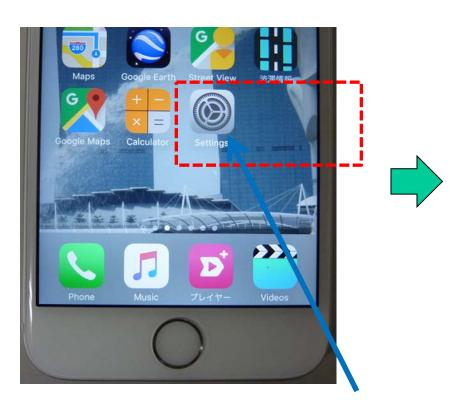


Double-tap this "setting" Icon and set "Wi-Fi" from off to ON

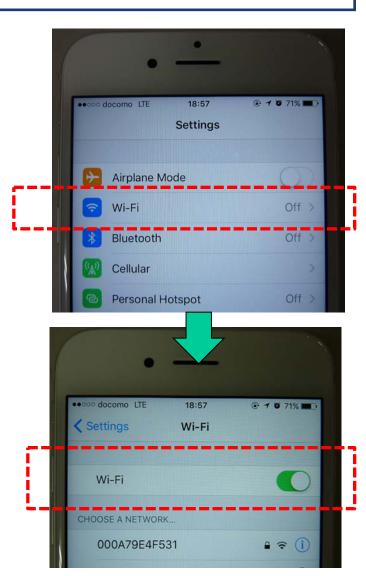

## **>>>**

## **Mobile Device Setting**

12. Tap the "MB2170" then tap "Join Anyway" for proceeding the connection.

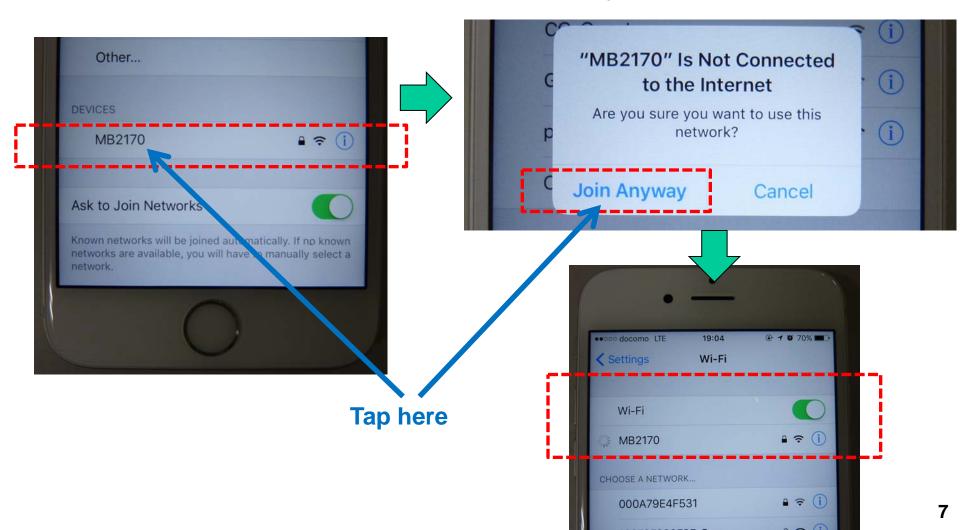

## **>>>**

## **Mobile Device Setting**

13. Then you see "Enter Password" on the LCD screen. Proceed to input the same


Password here Ex.) AAAAA

And tap "Join" to proceed connection.








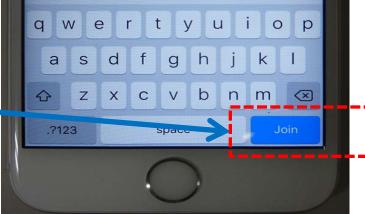

## **Mobile Device Setting**

14. Confirm the connection by checking the LCD screen as below. Then activate the "Mobile Print" by double-taping the Icon and tap "Add a printer"



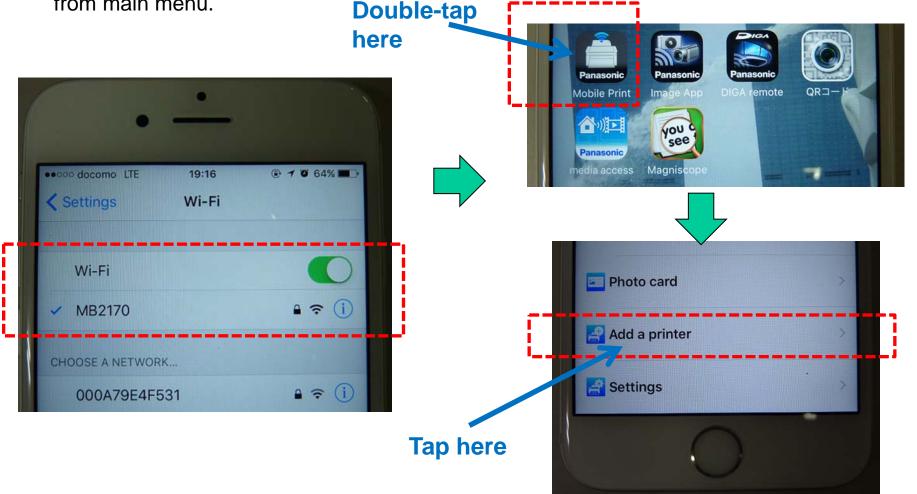

## **>>>**

## **Mobile Device Setting**

15. Tap "<Add a printer>". Then proceed to tap "Search printers" After you see "Bonjour" screen, please wait for a while ••• docomo LTE 19:05 until the Mobile Device find the Printer. Add a printer <Add a printer> Bonjour: Search printers Tap here @ 1 0 70% III Model: ••• docomo LTE 19:05 Add a printer <Add a printer> ••ooo docomo LTE 19:05 ♠ 1 9 70% ■ **Bonjour** Cancel Tap here Wait for a while **Until the Mobile Device** find the Printer 10

## **>>>**

## **Mobile Device Setting**

16. Tap the found printer name.Ex.) MB2170-23593509Then Proceed to tap "Add"By this process you could set the printer now.

