


Panasonic




Certificates & Standards

RoHS / TISI

Dimension and Materials

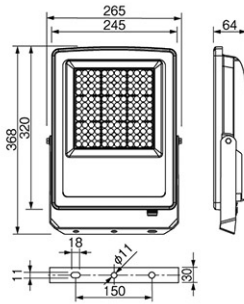

Photometric Chart

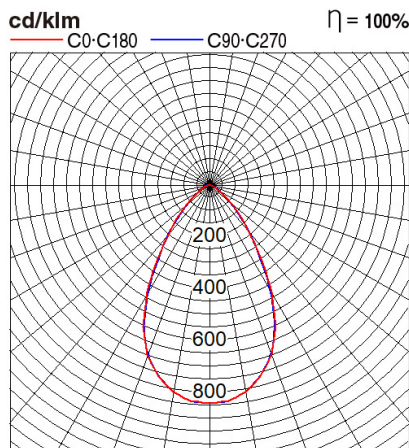

Ref. No.	
Type of Luminaire	Floodlight
	Standard Floodlight (Pro)
	Ex
Set Model No.	NNYC20281K7
Type of Light Source	LED
Power Input	100W
System Lumen Output	12500 lm
System Efficacy	125 lm/W
Power Voltage	220-240V
Power Factor	0.9
Lifetime	50000H(L70)
CCT	5700K
CRI	70
SDCM	<5
Input Frequency	50/60Hz
Dimming	non-Dimmable
Dimming Range	
UGR	
Glare Cut Angle	
Beam Angle	60deg.
Rotation Angle	
Tilt Angle	
IP code	66
IK code	
Ambient Temperature Range	-40 - 50°C
Surge Protection	10kV
Classification of Luminaires	Class I
THDi	
Effective Projected Area	
Driver	Integrated
Cut Out Size	
Dimensions	265mm*368mm*64mm
Weight	3.1 kg
Body	ADC(Gray)
Reflector	
Diffuser	Glass(Transparent)
Trim	
Casing	
Country of Origin	China
Brand	Panasonic
Remarks	

Others

Spec and certification may change without notice.